




NPT Nozzle Hose Swivels

Increased Hose Flexibility and Freedom of Movement

Setting Standards in Safety and Dependability since 1936.

NPT Nozzle Hose Swivels for Non Scully Nozzles

- Advanced ball bearing design allows for easy rotation at all operating pressures.
- Teflon high recovery seal and shielded bearings for optimum field performance.
- No nipple required to attach hose with male style swivels.
- Lightweight aluminum and zinc construction.
- Wide variety of liquid product use.

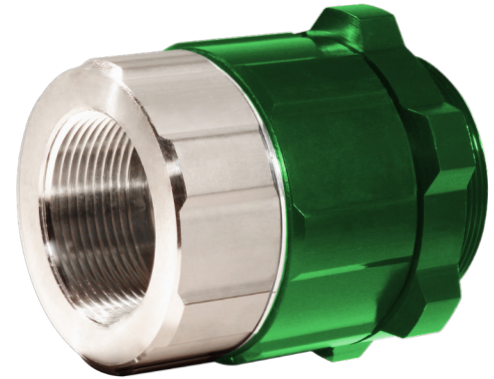

Inlet Style	Inlet Pipe Size	Male Outlet Thread	Part #
FEMALE	1 1/4"	1 1/4" Male NPT	05817
FEMALE	1 1/4"	1 1/2" Male NPT	05818
FEMALE	1 1/2"	1 1/4" Male NPT	05819
FEMALE	1 1/2"	1 1/2" Male NPT	05820
MALE	1 1/4"	1 1/4" Male NPT	05863
MALE	1 1/2"	1 1/4" Male NPT	05866
MALE	1 1/2"	1 1/2" Male NPT	05867
FEMALE	2"	2" Male NPT	05828
MALE	2"	2" Male NPT	05874

Copyright © 2019 Scully Signal Company. Dynachek, Dynamic Self-Checking, Dynamic Self-Testing, Faylsafe, Golden Gallon, IntelliCheck, Intellitrol, Mark IV, Mark V, Sculclamp, Sculflow, Sculmatic, Twis-Lok, Unifil, Ventafil, Ventalarm, V.I.P. and Whistler are registered trademarks of Scully Signal Company. All Rights Reserved. Specifications are subject to change without notice.

August 2019



Scully Signal Company
 70 Industrial Way
 Wilmington, MA 01887, USA
 800 272 8559 • sales@scully.com

Scully Systems Europe NV
 Maanstraat 25
 2800 Mechelen, Belgium
 +32 (0) 15 56 00 70 • info@scully.be

Scully UK Ltd
 Meridian House, Unit 33
 37 Road One Winsford Industrial Estate,
 Winsford Cheshire CW7 3QG, UK
 +44 (0) 1606 553805 • sales@scullyuk.com

